LM-25D

Lensmeter

Here is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitchHere is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitchHere is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitchHere is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitch Here is where you throw out your sales pitch

Specifications
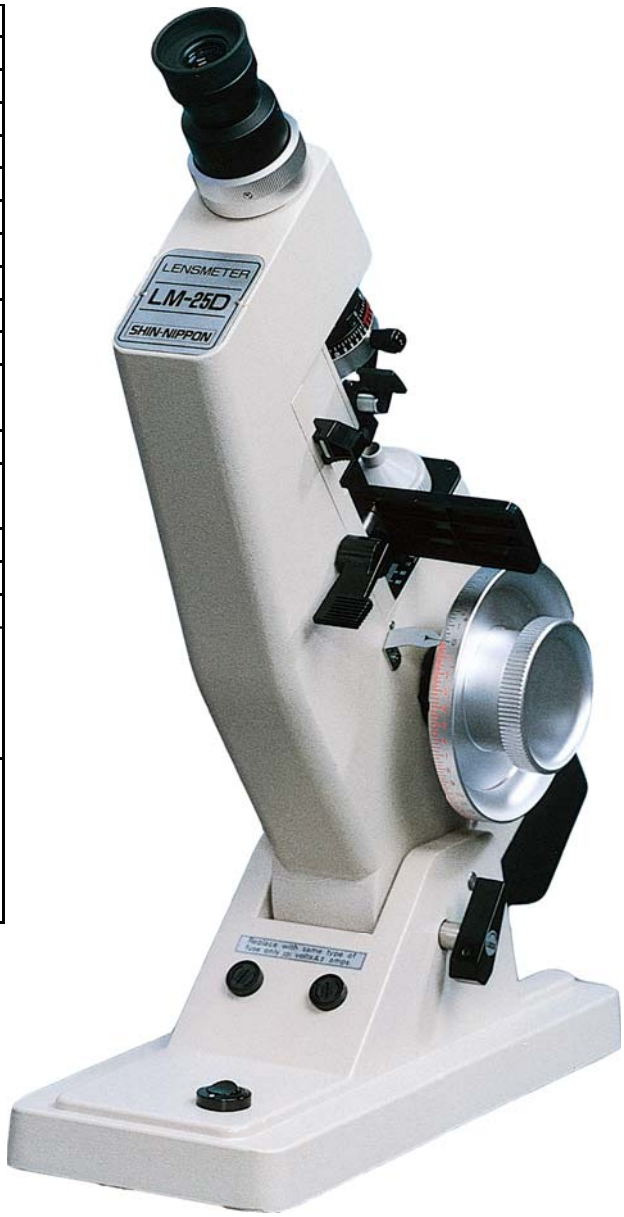
Vertex Power	Range	+25 diopters to -25 diopters
	Step	0.125 diopters up to ±3 diopters
		0.25 diopters beyond ±3 diopters
Prismatic Power	Range	5 Prism diopters
	Step	0.5 diopters up to 2 diopters
		1 diopter beyond 2 diopters
Cylindrical Axis	Range	0 to 180°
	Step	1°
Target Method	Bold crossline	
Lenses Accommodated	Diameter	24 to 90mm
	Step	2mm
Intervals of Lens holder	Pitch	16mm
Tilting Angle	30 to 90°	
Eyepiece Focusing	+7D to -10D	
Bulb	110V 15W	
Measurement	475(H) X 130(W) X 330(D)mm	
Net Weight	4.9kg	
Standard Accessories	2 bulbs 1 Vinyl cover 1 Contact lens holder 1 Bifocal lens holder	
Optional Accessories	Prism compensator Diopter range: 15 diopters Graduations: 1 diopter step Angle scale: 0-180° Graduations: 5°